

LEDPro™ Series High Output Lights

Product Manual

For Models:

- LEDPro Mini 1-Watt Light Kit, 3 Pack (Item #120813)
- LEDPro 3-Watt Light Kit, 3 Pack (Item #120810)
- LEDPro 6-Watt Light Kit, 3 Pack (Item #120817)
- LEDPro 12-Watt Single Light (Item #120828)



Table of Contents:

Important Information.....	2
Technical Specs	2
Installing Your LEDPro Lights.....	3
Maintaining Your LEDPro Lights	4
Troubleshooting.....	4
Warranty Information.....	4



IMPORTANT INFORMATION:

Please read these instructions thoroughly before use. Failure to follow instructions may result in equipment damage or failure, losses, injury or death.

⚠️ DANGER: ⚠️

To avoid possible electric shock:

- If the power cord, lens, or other components have been damaged, DO NOT operate, LEDPro Lights should be replaced.
- Close supervision is necessary when the unit is used by or near children.

⚠️ WARNING: ⚠️

To reduce the risk of electric shock:

- Connect only to a properly grounded receptacle, which is serviced by a Ground Fault Circuit Interrupter and never remove the ground pin from the plug.
- Provide a “drip loop” for the power cord. This is a loop in the cord below the level of the receptacle or plug that prevents water from traveling along the cord in the direction of the receptacle.
- ALWAYS unplug the LEDPro Lights from power source when not in use, and before installing, removing or servicing the LEDPro Light’s components.
- If an extension cord is necessary, a cord with a proper rating should be used. A cord may overheat if the cord is rated for less amperes or watts than the unit rating.
- DO NOT immerse the LEDPro Light’s plug, Transformer (A) or Splitter (B) in water. If any components get wet, do not attempt to use.
- The LEDPro Lights are NOT suitable for use in swimming pools, swimming ponds, or other situations where bodily contact is made with the water.

Important – LEDPro Lights may be used in or out of water. When used in open air application, unplug the lights and allow to cool before servicing.

⚠️ CAUTION: ⚠️

To reduce the risk of equipment damage or failure:

- DO NOT place LEDPro Lights near flammable or other dangerous materials or objects.
- DO NOT use the LEDPro Lights in fluids other than water.
- DO NOT exceed the voltage and wattage indicated on the transformer.
- DO NOT operate during freezing conditions. Remove LEDPro Lights and store in a protected location.

IMPORTANT:

The Pond Guy is not responsible for equipment damage or failure, losses, injury or death resulting from failure to follow safety precautions, misuse or abuse of equipment.

TECHNICAL SPECS:

MODEL	# OF LIGHTS	WATTAGE	ITEM NUMBER
LEDPro Mini 1-Watt	3	3x1 Watts	120813
LEDPro 3-Watt	3	3x3 Watts	120810
LEDPro 6-Watt	3	3x6 Watts	120817
LEDPro 12-Watt	1	1x12 Watts	120828

INSTALLING YOUR LEDPRO LIGHTS:

DO NOT TAMPER WITH POWER CORD.

Lights may be placed in or out of water.

Step 1

Plug the two-pin connector on the end of each Light(C) cord into the Splitter(B) and tighten plastic retaining nut.

Step 2

Plug the two-pin connector on the end of the Splitter(B) cord into the Transformer(A) and tighten plastic retaining nut. PLEASE NOTE: Splitter (B) cannot be fully submerged. Please ensure the placement is located out of the water.

Step 3

Place Lights (C) in desired locations.


Step 4

Make sure Photocell (E) is located out of the water, in an area exposed to natural light.


Step 5

Plug the Transformer (A) into a standard 110 volt outlet with GFCI.

LEDPro 1, 3, & 6-Watt Light Kits

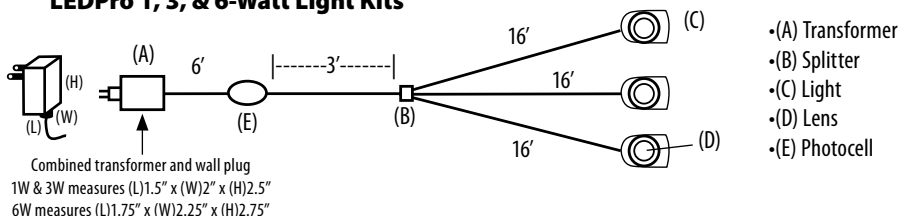

LEDPro 12-Watt Light Kits

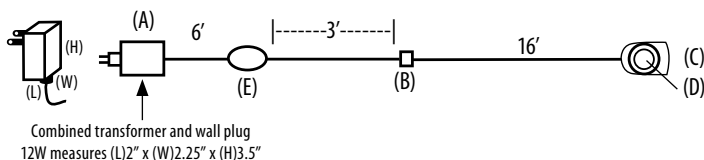

MAINTAINING YOUR LEDPRO LIGHTS:

MAINTENANCE:



Before performing any maintenance, always unplug the LEDPro Lights from the power source.

CLEAN lenses regularly to remove algae/debris buildup that will reduce light intensity.

CLEAN with a soft cloth or brush with water, or a descaler if needed. When using a descaler be sure to rinse components well before reinstalling.

TROUBLESHOOTING:

One or more lights fail to illuminate:

- Check connection from Light(C) to Splitter(B)
- Inspect Lens(D) for algae/debris accumulation
- Ensure bulb is properly seated in housing
- Replace bulb (3-Watt light set only)

All lights fail to illuminate:

- Make sure Transformer(A) is properly seated in electrical outlet
- Make sure electrical outlet provides power
- Check Splitter(B) to Transformer(A) connection
- Check connections from Lights(C) to Splitter(B)
- Ensure bulbs are properly seated in housing and check photocell

Lights stay on during the day:

- Make sure photocell is upright, unobstructed & exposed to sunlight

REPLACEMENT PARTS / ACCESSORIES

DESCRIPTION	ITEM NUMBER
LEDPro 3-Watt Replacement Bulbs (Choose from red, blue, yellow, warm white, cool white. Warm white comes standard)	120812
ThePondGuy® Colored Lens Set for LEDPro™ Mini 1-Watt (Comes with red, blue, yellow & green lenses)	190135
20' Extension Cord (Maximum of 1 extension should be added per light)	110525

PRODUCT WARRANTY:

LEDPro Series High Output Lights carry a 3-year warranty. The Pond Guy will repair or replace any units found to be defective. This limited warranty is extended exclusively to the original purchaser and begins from the date of original purchase receipt. Abuse or misuse of this product or power cord alterations void all warranty. Please call for a Return Authorization Number prior to returning product by calling our Customer Care Department at 866-766-3435. Failure to request an RMA number may result in delay or dismissal of your warranty claim.

THANK YOU FOR CHOOSING:

The Pond Guy® Inc.
We Know Ponds™
15425 Chets Way
Armada, MI 48005

866-POND-HELP (766-3435)
thepondguy.com

V3

View other great products on-line at www.thepondguy.com